

Grinders / Mini Goliath



The Mini Goliath is the most compact low speed grinder.


This granulator has been designed for recycling of very small sprues (1 mm diameter up to 6 mm) including glass fiber material.

The cutting chamber is composed with 1 or 2 reversible cutters, 2 or 3 rollers of 70 mm diameter. i.e 134 x 113mm or 134 x 176mm cutting chamber.

Il mini Goliath è il più compatto granulatore della serie.

Pensato per granulare matarozze molto piccole (1 mm diametro fino a 6 mm) è in grado di granulare anche fibra vetro.

La camera di granulazione è composta da 1 o 2 cutters reversibili; 2 o 3 cilindri dentati di granulazione del diametro di 70 mm. Le dimensioni della camera di granulazione sono di 134x113 mm o 134x176mm

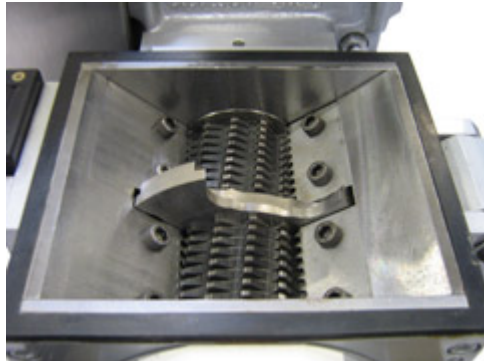

Cutting chamber Mini 1



Cutting chamber Mini 2

Options

- **Small hopper**
- **Gear motor** 0,55 kW instead of 0,37 kW
- **Granulometry** Rollers with tooth configuration both trapezoidal and helical. 2 sizes available : tpz5 and tpz4 in option

Technical data

	Mini Goliath	MINI 1	MINI 2
Transmission			Direct
Motor power (kW)			0,37 (0,55)
Speed (rpm)			25
Cutting chamber (mm)		134 x 114	134 x 176
Granulometry (mm)			4 ou 5
Maximum theoretical output* (kg/h)		2	3
Weight (kg)		45	50

* Important variations according to material, granulometry and way of feeding.